




TEMPERATURE RISE CORE

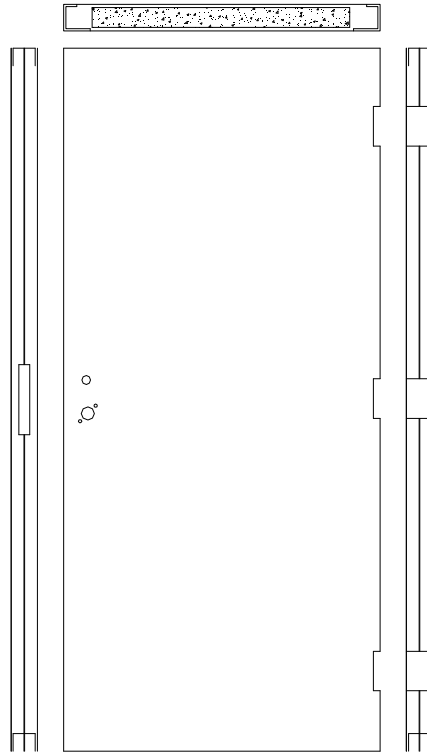

Mineral Core

Your choice of door skin gauges and your choice of steel types:

18ga, 16ga, 14ga, 12ga or 10ga with CRS, A60, G90, or Stainless Steel # 304 or # 316

1-3/8", 1-3/4" or Custom Thickness, UL's Fire Rated Labels

Temperature Rise Rating Labeled

Min. Sound Transmission (STC) ~ 32

Min. Thermal "R" Factor ~ 4.0

Min. "U" Factor ~ 0.28

Square or Beveled Edge choices:

Hair Line Seam, Continuously Welded or Filled Smooth Seamless Edges

Solid Core only for rated openings, Single Rib, or Multiple Ribbed, Core Constructions



Rev. 04/20/09

3228 6th Avenue North, PO Box 635 Birmingham, AL. 35222
TOLL FREE (888) 322-7750 Fax (205) 322-4600
<http://www.megametusa.com>